

CRUSSIS

Installation instructions for kick scooters series ACTIVE, URBAN, ROAD



Step 1.

Make sure that carton is not damaged




Step 2.

Remove the kick scooter out of the box



Step 3.

Wheels are attached to the frame

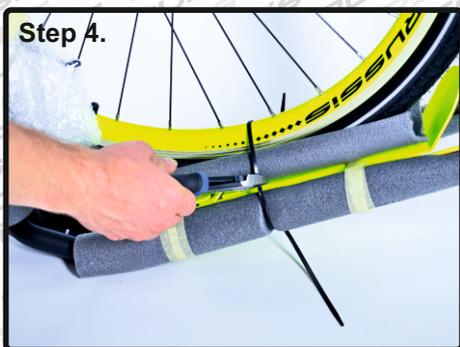

Step 4.

Remove the tape holding front and rear wheel



Step 5.

Put wheels aside



Step 6.

Remove the protecting material from frame



Step 7.

Remove the protecting material from handlebars



Step 8.

Assembling of the kick scooter is only in attaching wheels and handlebars



Step 9.

Loosen the screws on the stem and align so that it faces forward while riding



Step 10.

In this step set the direction of the stem roughly. You will align it precisely later with the wheel on



Step 11.

Tighten the screws on the stem with force 4 NM



Step 12.

Remove the screws from the front part of the stem



Step 13.

Attach the handlebars



Step 14.

Put back the front part of the stem and lightly tighten, adjust the angle of the handlebar and screw it with 4 NM



Step 15.

Put wheels back on



Step 16.

Tighten quick release. Mind the direction of the wheel



Step 17.

Correct position of the quick release axle to the fork after tightening



Step 18.

At the front and rear brake put cable guard into cable bridge



Step 19.

Adjust the boot (gum)



Step 20.

Test the brakes




Step 21.

If the brake is rubbing the rim adjust the position of the brake pad. With tightening the screw distance will increase



Step 22.

Check the slope of the handlebars so it will suit the angle of the brake levers. We recommend setting at 45 degrees

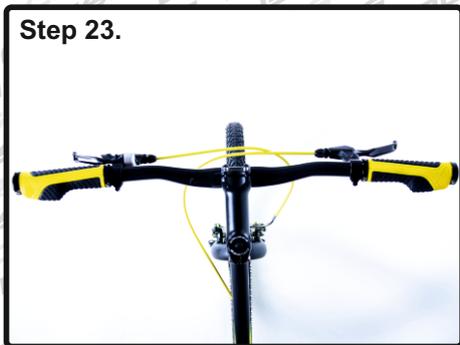

Step 23.

Stem and front wheel must form a single axis. Make sure that stem is properly tightened with force 4 NM



Step 24.

We wish you many happy kilometers on your new kick scooter CRUSSIS!

